

MOHAWK LIFTS - MOBILE COLUMN FORK COMPARISON

MOBILE COLUMNS... IF YOUR VEHICLE WAS DESIGNED TO TRAVEL ON 4 REAR TIRES, IT SHOULD BE LIFTED ON 4 REAR TIRES

**Mohawk MP-Series
Mobile Column
Extended forks for dual rear tires**



Street Sweepers Need 22" Lifting Forks

WARNING LABEL ON ROTARY LIFT

OPERATING CONDITIONS: Lift is not intended for outdoor use and has an operating ambient temperature range of 41°-104°F (5°-40°C).

DO NOT use lift in a manner other than intended. Included (but not limited to) examples of unapproved uses of the lift:

DO NOT raise/lower only one side of a vehicle.

Lift only on same axle. DO NOT stagger between axles.

DO NOT drive over or pinch electrical cables.

Ensure tires are properly inflated before lifting. DO NOT exceed tire load rating when raising vehicle.

4.5" Maximum allowed floor slope is 1/8" per foot side to side of vehicle and 1/4" per foot front to rear of vehicle. DO NOT use on a suspended floor structure without specific approval from structural engineer.

Ensure tires are properly inflated before lifting. DO NOT exceed tire load rating when raising vehicle.


E4	Out Of Level
E5	Emergency Stop
E6	Potentiometer Error
E7	Short Circuit Detected
E8	Software Mismatch
E9	Crash

30 Rev. C




Side-wall tire rating


**Typical Mobile Column
Short forks on all columns**

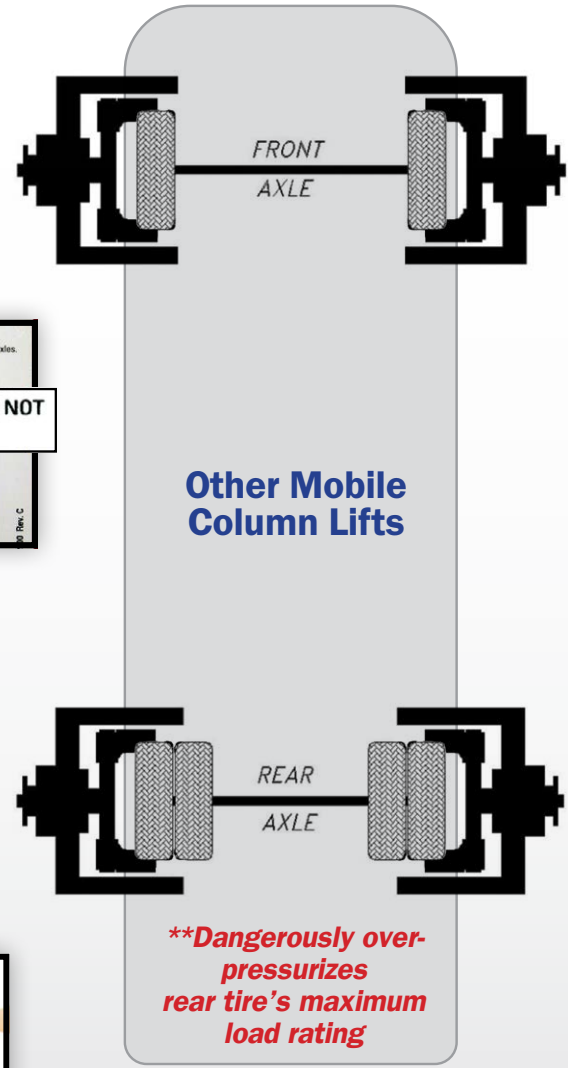

The inset of RV tires requires long lifting forks

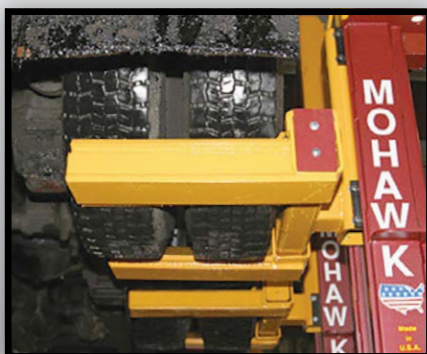

22" long lifting forks engage both rear dual tires

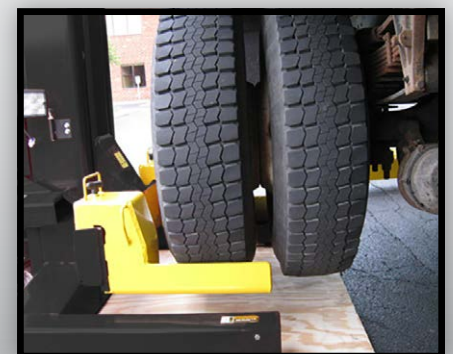

Other lift brands with shorter forks only engage the outer tire

MP-SERIES MOBILE COLUMN LIFT OPTIONS



Shown: MP-18
Accessory #MP-2200

FORK LIFT ADAPTERS ▲

- Allows fork lifts to be serviced with the tires hanging free
- 28,000 lb. lifting capacity



Shown: MP-18
Accessory #MP-2500

FRONT TO REAR BUMPER ▲ ADAPTER

- Slips over the forks to allow vehicle to be raised by the bumper or frame
- 26,000 lb (one pair) lifting capacity



Shown: MP-18
Accessory #MP-18-030

LONG LIFTING FORKS ▲

22" long forks allow BOTH rear tires to be lifted so they are not over pressurized



MID & FULL HEIGHT JACK STANDS ▲

- 20,000, 30,000 or 40,000 lb. capacities
- Allows multiple vehicles to be raised with just 1 set of columns
- Complies with requirements of ASME PASE standard for portable automotive lifting devices
- 7" fine adjustment at top of stand
- Spring loaded for easy raising and lowering



SLOPE INDICATOR ▲

Attaches to the mobile column to display the floor slope measured in degrees



Shown: MP-18
Accessory #MP-2400

WING PLOW ADAPTER/RV SLIDE OUT ADAPTER ▲

- Allows wing snow plow trucks to be raised without removing the snow plow
- Allows RV slides to be extended and lifted
- 25,000 lb. lifting capacity



Shown: MP-18
Accessory #MP-2300

CHASSIS LIFTING BEAM ▲

- Permits vehicles to be raised by the frame, leaving the wheels hanging free
- 35,000 lb. lifting capacity.



AUTO FRAME ADAPTER ▲

Quickly slides over lifting forks & allows two columns to raise cars & light trucks by the frame to leave the wheels free